




# Technical Data

# TrimLineSeries™ SEMI-RECESSED PAPER TOWEL DISPENSER AND WASTE RECEPTACLE

# B-38032

### Specify Finish Required

- Stainless Steel, Satin Finish
- Matte Black Finish, please use model no. B-38032.MBLK

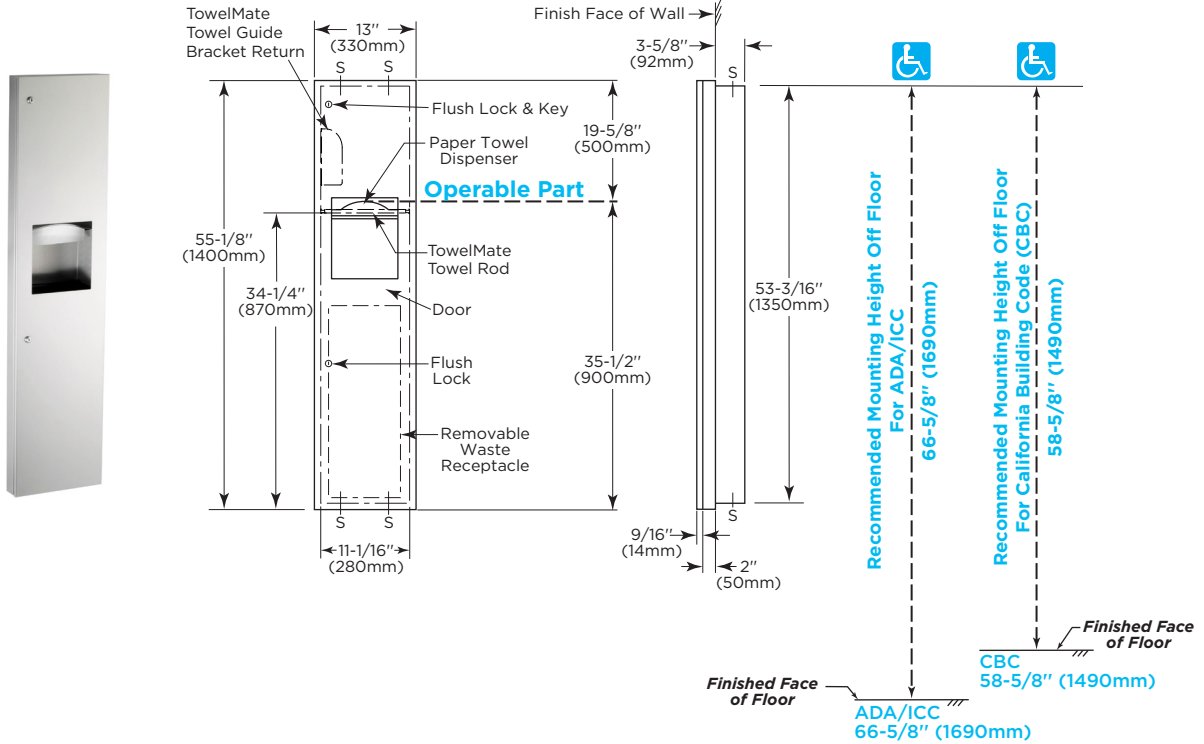

### Rough Wall Opening

- 11-1/2" (292mm) wide
- 53-5/8" (1362mm) high
- 3-3/4" (95mm) minimum recessed depth



### ADA/CBC Installation Guidance

**\*Operable Part:** Top of paper towel dispenser opening

#### Maximum mounting height of Operable Part:

ADA/ICC: 48" above finished floor (AFF)

CBC: 40" above finished floor (AFF)

\*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

### MATERIALS:

**Cabinet** — 18-8, type-304, heavy-gauge stainless steel. All-welded construction.

**Door** — 18-8, type-304, 18-gauge (1.2mm) stainless steel with satin-finish or matte black, as specified. 9/16" (14mm) 90° return for maximum rigidity. Secured to cabinet with a concealed, full-length, stainless steel piano-hinge. Equipped with stainless steel cable door-swing limiter and two tumbler locks keyed like other Bobrick washroom accessories. Tumbler locks flush with the door - no protrusion.

**Skirt** — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish or matte black, as specified.

**Paper Towel Dispenser** — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish or matte black, as specified. Rounded towel tray has hemmed opening to dispense paper towel without tearing. Capacity: 600 C-fold, 800 multifold, or 1100 singlefold paper towels. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling forward out when door is opened for servicing.

**TowelMate® Towel Rod Assembly** — Consisting of a round Nylon Rod and (2) stainless steel Rod Screws for attachment, is field replaceable. Stainless steel Stop Screws (2) lock TowelMate Rod assembly in place. To retrofit TowelMate into existing install units manufactured prior to Feb. 2021, order TowelMate Accessory Bobrick Model No. 3803-130.

**Waste Container** — Leakproof, rigid molded plastic. Removable for servicing. Capacity: 6.3-gal. (24-L).

continued . . .

**OPERATION:**

Paper towel dispenser is adjustable to dispense C-fold, multifold, or singlefold paper towels without use of additional adapters or towel trays. To service waste receptacle, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls.

**INSTALLATION:**

Provide framed rough wall opening 11-1/2" wide x 53-5/8" high (292 x 1362mm). Minimum recessed depth required from finish face of wall is 3-3/4" (95mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws (not furnished).

**SPECIFICATION:**

Semi-recessed paper towel dispenser and waste receptacle shall be type-304 stainless steel; all-welded construction. Exposed surfaces shall have satin finish or matte black, as specified. Unit equipped with TowelMate consisting of a 90° return towel guide angle inside cabinet to prevent paper towels from falling forward out when door is opened for servicing and a Nylon Rod across the center of the towel tray to dispense paper towels one at a time. Door with 9/16" (14mm) 90° return shall be secured to cabinet with a concealed, full-length, stainless steel piano-hinge and equipped with a stainless steel cable door-swing limiter and two tumbler locks. Tumbler locks flush with the door - no protrusion. Paper towel dispenser shall be capable of dispensing 600 C-fold, 800 multifold, or 1100 singlefold paper towels. Waste receptacle shall be furnished with a removable, leakproof, rigid molded plastic waste-container with a capacity of 6.3-gal. (24-L).

**Semi-Recessed Paper Towel Dispenser And Waste Receptacle shall be Model B-38032 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**