



The Complete Hand Dryer Line from Bobrick

Design Meets Performance

DESIGN

SUSTAINABLE

COMPLIANT

ECONOMICAL

HYGIENIC

BOBRICK

BUILDING VALUE SINCE 1906

B-38030 3IN1


Superior hygiene and efficiency by combining paper towel and warm air

*Applications: Upscale Properties • Corporate Headquarters • Executive Offices
• Michelin Star Restaurants*

TowelMate®
provides single
towel each time
- compatible with
almost any size
paper towels

Centralised Hand
Drying Zone for
compliance and
convenience

100 mm Cabinet
Depth offers easy
installation and
maximum usable
floor space

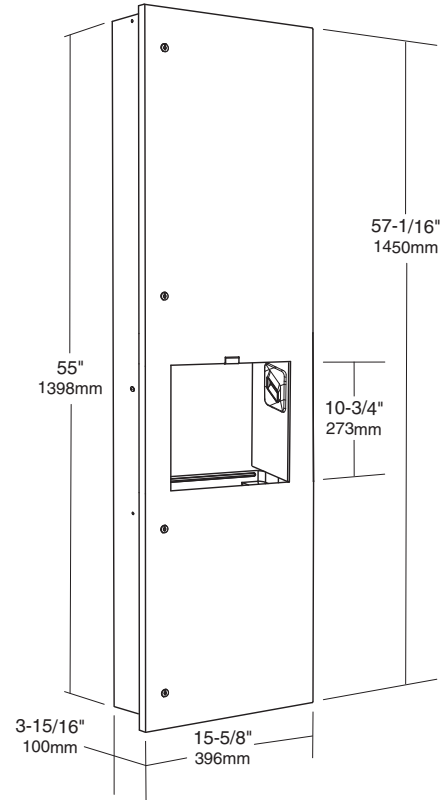

- Accessibility compliant reach range
- Sustainable 0.9 kW warm air hand dryer
- Automatic sensor encourages use of both paper and air
- Dual air outlets for comfortable, complete dry
- Installs in a 100 mm wall depth
- Surface Mounted optional skirt kit available, order part number 38030-98

Dimensions

Unit: 396 W x 1450 H x 114 mm D

Wall Opening: 362 x 1412 x 100 mm



B-3725 Recessed Hand Dryer

Contemporary low-profile design, accessible, splash-resistant


*Applications: Upscale Properties • Corporate Headquarters • Executive Offices
• Concert Halls*



Stylish cooling grid enhances architectural design

Indicator lights:

- Flashing green light indicates ready to use
- Solid red light is a call for service

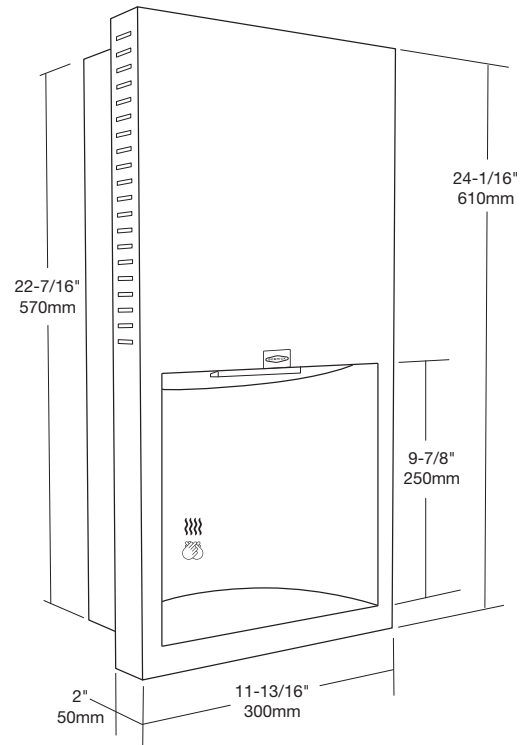

Spacious alcove design fully encloses patrons' hands and prevents water spill on the floor



Splash-resistant surface material evaporates excess water. Surface replacement part 3725-23

- 50 mm wall projection for compliance
- Type 304 satin-finish stainless steel
- 70 dBA sound level
- 1.0 kW rated power
- Installs in a 100 mm wall depth
- 5-year limited warranty

Technical data:

B-3725 115V AC, 8.5 Amp, 50/60 Hz, 1.0 kW, Single Phase, cULus Listed

B-3725 208-240V AC, 4.0-4.4 Amp, 50/60 Hz, 1.0 kW, Single Phase, cULus Listed and CE marked



B-7125 InstaDry™

Lowest wattage jet dryer for sustainability and economy

Applications: Heavy Traffic • Stadiums • Transportation Hubs • Restaurants



With best-in-class 200 watt output and a dry time of less than 12 seconds, InstaDry offers exceptional energy efficiency. Low annual operating costs in high-traffic environments are up to 80% less than other leading dryer brands.

- Long lifespan of 7,500+ hours can last more than 10 years in high-traffic washrooms
- Type 304 satin-finish stainless steel design complements other Bobrick accessories
- Less than 100 mm wall projection for accessibility compliance
- 5-year limited warranty
- 200 W power consumption allows multiple units to be installed on one circuit breaker

Superior Cost-in-Use

Feature	InstaDry	Brand X Eco	Brand D
Power Rating	0.2 kW	0.5 kW	1.0 kW
Annual Electrical Running Cost*	£	£££	£££££

*Cost is based on 500 activations per day, such as a sports stadium at 12.5 cents per kWh (based on US average electrical cost taken from U.S. Energy Information Administration).

Technical data:

115V AC 1.76 Amp or 208-240V AC 0.88 Amp, 50/60 Hz, 0.2 kW, Single Phase, cULus Listed, CE marked



QuietDry™ Series

Contemporary design, low noise and accessibility compliance

Applications: Moderate Traffic • Commercial Offices • Schools • Universities • Retail



TerraDry™
B-7188/B-7180

- 70 dBA sound level
- 1.0 KW rated power
- Die-cast aluminium cover: chrome or white epoxy
- 100 mm projection
- 10-year limited warranty






TrimDry™
B-7128/B-7120

- 71 dBA sound level
- 1.7 KW rated power
- Steel cover: brushed stainless steel or white epoxy
- 100 mm projection
- 10-year limited warranty



DuraDry™
B-778/B-770

- 72 dBA sound level
- 1.4 KW rated power
- Die-cast aluminium cover: chrome or white epoxy
- 10-year limited warranty

Brand	Bobrick	Brand X	Brand D
Measured Decibels (dBA)*	72 dBA 	83 dBA 	86 dBA 
*TEST METHODOLOGY: Noise levels declared for all products are measured in a semi-reverberant laboratory settings with dryer mounted at the manufacturer's recommended height. Visit bobrick.com for additional test results.			





BUILDING VALUE SINCE 1906

Bobrick International	Bobrick.co.uk	Bobrick.la	Bobrick.de	Bobrick.com
Europe	+44 (0)20 8366 1771			euoffice@bobrick.com
UK	+44 (0)20 8366 1771			info@bobrick.co.uk
Germany	0800.79.00.456			info@bobrick.de
Spain	+34 609 791 484			info@bobrick.com.es
Latin America	+1.954.755.8934			info@bobrick.la
Middle East	+971 (50) 1747386			infomea@bobrick.com
Australia	1800.353158			info@bobrick.com.au
Asia	+971 (50) 1747386			infomea@bobrick.com
Global HQ	+1.818.764.1000			international@bobrick.com