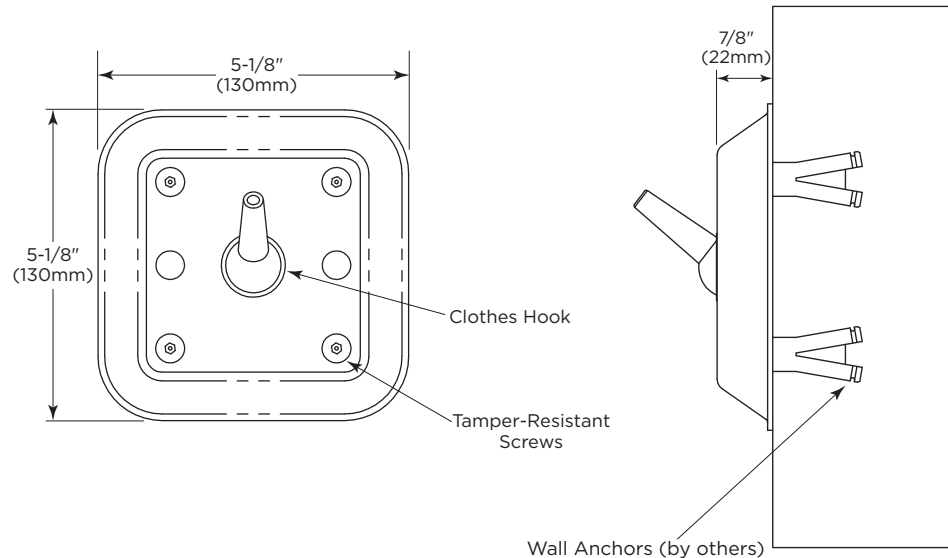


BOBRICK**Technical Data****ADJUSTABLE AUTO-
RELEASE CLOTHES/
TOWEL HOOK****B-9884****MATERIALS:**

Hook assembly fabricated from stainless steel machine. Housing is fabricated from 14-gauge 304 stainless steel and powder coated white. Unit is furnished with four (4) 1/4"- 20 UNC tamper resistant flat screws and one (1) 5/32" hex bit for center reject pin for use with installer provided wall anchors.

OPERATION:

Auto-release hooks have an adjustable releasing range of zero to twenty-five pounds. The release point is factory set to release at 10 ± 2 pounds at the base of the hook. The release point can be field adjusted using a 3/32" Allen wrench. To increase the loading limit, turn the adjusting screw clockwise; to decrease the loading limit, turn the adjusting screw counterclockwise. The auto-release function deters utilizing the product as a point of ligature.

INSTALLATION:

Use punched mounting holes in fixture as a template for marking the locations for the wall anchors (not provided) on the wall. Install the wall anchors. Fasten the fixture to the wall using the screws (provided).

SPECIFICATION:

Auto-release hook shall be type 304 stainless steel; exposed surfaces on the plate shall be powder coated white. Square Hook plate has a side length of 5 1/8" (130mm). Auto-release hooks have an adjustable releasing range of zero to twenty-five pounds. The release point is factory set to release at 10 ± 2 pounds at the base of the hook.

Adjustable Auto-Release Clothes/Towel Hook shall be Model B-9884 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.